



TECHNICAL INFORMATION

Watts:	100
Lumens:	8500
Input Power:	AC:220-240V,50/60Hz
Long Life:	20,000 Hours
Unit Color:	Black
Body Type:	Aluminium
PF:	>0.9
LED Chip Type:	SMD 2835
CRI:	>70
Operation Temperature:	-20°C to +40°C
Dimmable:	No
Beam Angle:	110°
Color:	6500K
Dimension:	330x271x33mm


BLACK SLIMLINE E SERIES

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 5966 - 934 938

[View more details](#)

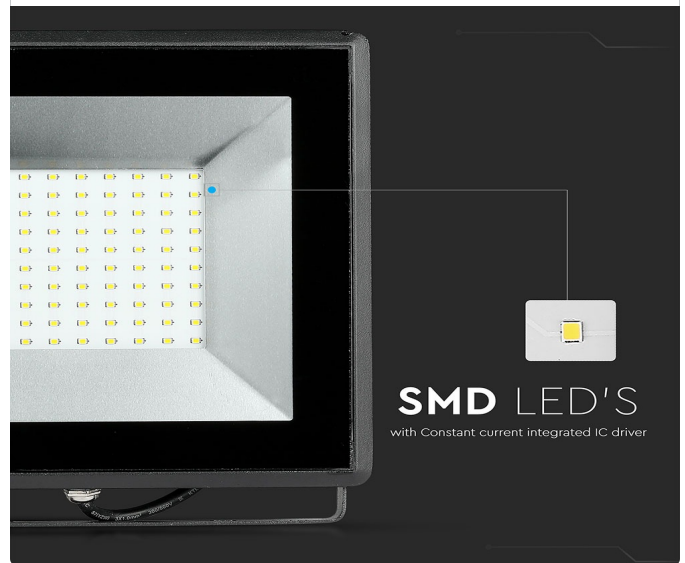

SMD LED'S
with Constant current integrated IC driver



IP65
RATING



2 YEAR
WARRANTY



IK 06

FEATURES

- Perfect replacement for Metal Halide Floodlights, High Pressure Sodium Floodlights and Halogen Floodlights
- High quality LED SMD 2835 chip and high power driver
- Fascia glass sealed with Silicone Rubber for superior waterproof / airtight performance
- Constant current Integrated IC driver - Built in driver - no external power supply required
- Built Strong and durable with Aluminium - Corrosion resistant design
- Excellent coverage for area and façade lighting
- Suitable for building facades, sports facilities, industrial, commercial billboards, hoardings, parking lots etc.
- Recommended daily usage: 10 - 12 hours *Exceeding recommended daily usage will void warranty

PACKAGING

Gross Weight (Kgs): 2.4
Unit CBM: 0.00317625
Dimension: 330x271x33mm

MASTER BOX PACKAGING

Box Qty: 5
Qty Per Pallet: 220
Length (Box) mm: 36
Width (Box) mm: 273
Height (Box) mm: 335

LISTING DETAILS

Commodity Code: 9405403990
EanCode: 3800157625593

CE/EMC CE/LVD

