





TECHNICAL INFORMATION Watts: Lumens: Input Power: AC:220-240V, 50Hz Long Life: 20,000 Hours Unit Color: Black Body Type: Aluminium >0.6 LED Chip Type: SMD CRI: >80 -20°C to +45°C Operation Temperature: Dimmable: No Beam Angle: 150° Color Temperature: 3000K



Dimension:







220x48x90mm



FEATURES

- Modern range of Up-Down lights with sleek and stylish designs
- Elegant replacement for traditional up-down lighting
- $^{\bullet}\,$ Fitted with high quality SMD chips for better reliability and longer lifespan
- Robust Aluminium build for efficient heat dissipation
- Suitable for living rooms, pathways, balconies, facades etc.

C€/EMC C€/LVD




SEMI OVAL BRIDGELUX

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8619 - 1234 938 View more details

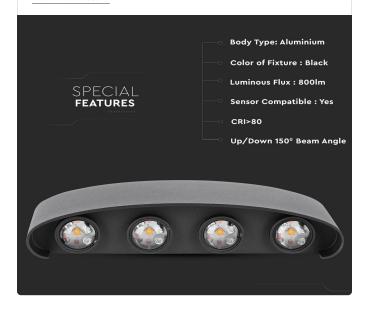

PACKAGING

Gross Weight (Kgs): 0.762
Unit CBM: 0.001299375
Dimension: 220x48x90mm

MASTER BOX PACKAGING

Box Qty: 20 Qty Per Pallet: 600 Length (Box) mm: 55 Width (Box) mm: 225 Height (Box) mm: 105

LISTING DETAILS

Commodity Code: 9405403990 Ean Code: 3800157652315